



Specs


Waterproofing of existing expansion joint not subject to hydrostatic pressure

Products required

- **MAXSEAL FLEX**
- **MAXFLEX XJS**
- **MAXJOINT ELASTIC**

Method

1. Prepare area to be treated by removing any loose materials ensuring a clean and sound surface.
2. Remove existing expansion joint to accommodate **MAXJOINT ELASTIC** as per technical data bulletin # 156.00
3. Allow for initial set before applying **MAXFLEX XJS**, around 60 minutes @ 25 degrees celcius.
4. **MAXFLEX XJS** is bonded to the concrete or masonry substrate by **MAXSEAL FLEX** as per technical data bulletins 73.00 & 29.05 respectively.

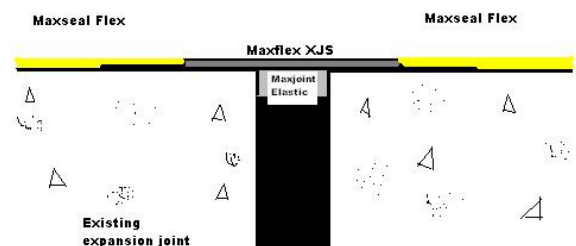

Note – This information is based on information from the manufacturer and from our own experience. The information contained in this specification should be used in conjunction with the appropriate technical data bulletins and material safety data sheets available from our office or website

www.swepdri.com.au



SwepDri International Pty Ltd
ABN: 80 003 944 803
Waterproofing and Construction Products



National Hotline 1300 303 301 National Distributors PO BOX 694 PADSTOW NSW 2211 NSW AUSTRALIA National Faxline 1300 369 932